


# Lightning Current Counter LSC-A



## Installation

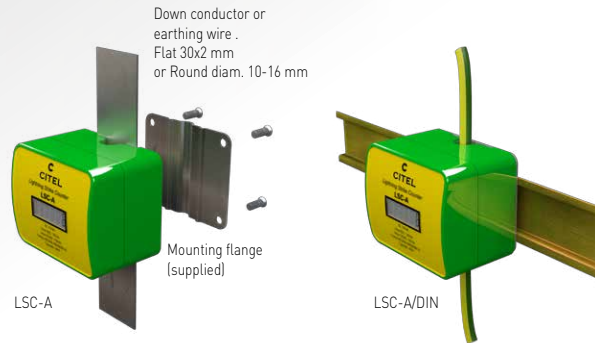

- **Lightning current counter**
- **For LPS and SPD**
- **Outdoor or indoor application**
- **Mounting on conductor or DIN rail**
- **Compliance with EN 62561-6**

## Characteristics

CITEL model	LSC-A
Description	Lightning current counters outdoor or indoor
Minimum current sensibility	0.5 kA
Max. admissible impulse current	100 kA
Maximum numbers of events	999999
Type d'affichage	LCD
Dimensions	66 x 55 x 47 mm
Weight	0,14 kg
Enclosure	Thermoplastic UL94-V0
Power supply	internal by battery
Life expectancy (before battery replacement)	> 10 years
Mounting	by flange on round (diam. 10-16mm ) or flat (30 x2mm) conductor or DIN rail
Protection rating	IP67
Compliance	EN 62561-6
<b>Part Number</b>	
LSC-A	790121
LSC-A/DIN	790122