


Smart SPD Tester SPT-203

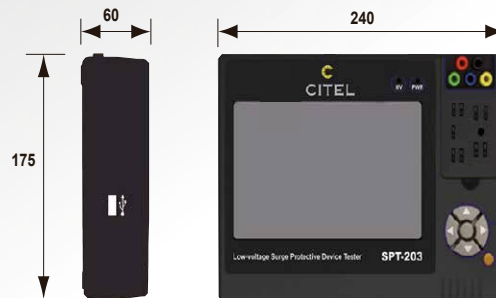

- 7-inch TFT display with touch-screen
- Testing the MOV, GDT and TVS components
- Automatically test and judge CITEL pluggable Surge Protectors
- Auto test mode and manual test mode
- Automatically save test data
- Database management
- Portable and convenient

Characteristics

CITEL model	SPT-203
Charge voltage	AC 230 Vac single phase
Power	< 16 W
Voltage measurement error	+/- 2% (U < 200 V) +/- 1% (U > 200 V)
Leakage current measurement error	+/- 5%
MOV measurement	
1 mA voltage range	1 to 2000 V
Leakage current range	0 μ A to 120 μ A
GDT measurement	
DC spark voltage range	1 to 2000 V
TVS measurement	
Voltage range	0 to 500 V
Surge Protector measurement	
CITEL range :	- AC Type 2/3 SPD: DS10, DS40, DS40VG, DS70R - AC compact Type 2/3 SPD : DS215, DS240, DS415, DS440 - AC Type 1/2 SPD: DS130R, DS130 VG - PV Type 2 SPD: DS50PV, DS50VGPV - Dataline SPD: DLA
Automatic test of pluggable module	