



# Type 1 + 2 Surge Protector DS250E series

**limp  
25 kA**




DS250E-300

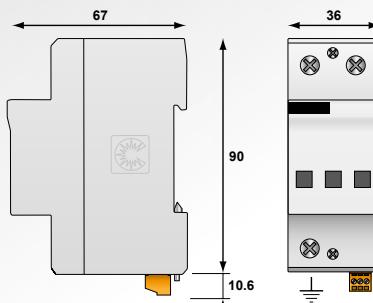

V : High energy varistor network  
Ft : Thermal fuse  
C : Remote signaling contact  
t° : Thermal disconnection system  
MI : Disconnection indicator

- Type 1 + 2 unipolar Surge Protector
- **limp : 25 kA on 10/350 µs impulse**
- **I<sub>max</sub> : 140 kA on 8/20 µs impulse**
- **Internal disconnections, status indicators and remote signaling**
- **IEC 61643-11, EN 61643-11 and UL1449 ed.4 compliance**

## DS25x E-xxx/G

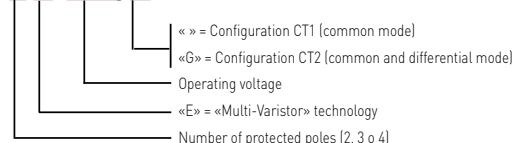


« » = Configuration CT1 (common mode)  
« G » = Configuration CT2 (common and differential mode)  
Operating voltage  
« E » = « Multi-Varistor » technology  
Number of protected poles [2, 3 or 4]

## Characteristics

CITEL Model	DS250E-400	DS250E-300	DS250E-120
Description	Type 1+2 AC surge protector 1-pole		
Network	230/400V	230/400V	120/208V
Max. AC operating voltage	U <sub>c</sub> 440 Vac	330 Vac	150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec.	UT 580 Vac withstand	335 Vac withstand	180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn	UT 770 Vac disconnection	440 Vac disconnection	230 Vac disconnection
Residual current - Leakage current at U <sub>c</sub>	I <sub>pe</sub> < 3 mA	< 3 mA	< 3 mA
Max. Load current (if connection serie)	I <sub>L</sub> 100 A	100 A	100 A
Follow current	I <sub>f</sub> None	None	None
Nominal discharge current - 15 x 8/20 µs impulses	I <sub>n</sub> 50 kA	70 kA	70 kA
Max. discharge current - max. withstand @ 8/20 µs by pole	I <sub>max</sub> 140 kA	140 kA	140 kA
Impulse current by pole - max. withstand 10/350µs	limp 25 kA	25 kA	25 kA
Specific energy by pole	W/R 156 kJ/ohm	156 kJ/ohm	156 kJ/ohm
Protection level	Up 2.5 kV	2.5 kV	1 kV
Admissible short-circuit current	I <sub>scsr</sub> 50000 A	50000 A	50000 A
Associated disconnectors			
Thermal disconnector	internal		
Fuses	Fuse type gG - 315 A		
Installation ground fault breaker	Type «S» or delayed		
Mechanical characteristics			
Dimensions	see diagram		
Connection to Network	By screw terminals : 6-35 mm <sup>2</sup> / by bus		
Disconnection indicator	3 mechanical indicators		
Remote signaling of disconnection	output on changeover contact		
Mounting	Symmetrical rail 35 mm (EN60715)		
Operating temperature	-40/+85°C		
Protection rating	IP20		
Housing material	Thermoplastic UL94-V0		
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.4		
Certification	EAC		
Part number	3731	2730	3106



# Type 1 + 2 Multipolar Surge Protector DS252E, DS253E, DS254E

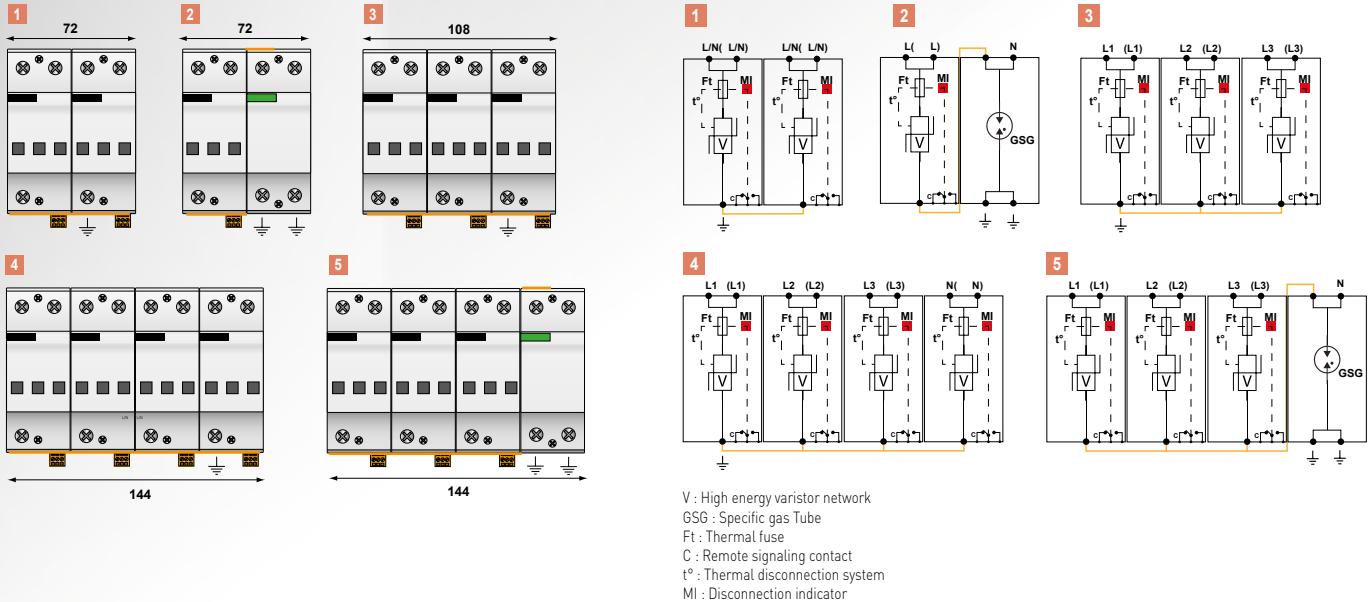

Model	P/N	Network	AC system	Protection Mode	I <sub>total</sub>	Up L/PE	Up L/N	Up N/PE	Diagram
DS254E-300/G	3411	230/400 V 3-phase+N	TT-TNS	L/N and N/PE	100 kA	-	2.5 kV	1.5 kV	5
DS254E-120/G	3831	120/208 V 3-phase+N	TT-TNS	L/N and N/PE	100 kA	-	1 kV	1.5 kV	
DS254E-400	3732	230/400 V 3-phase+N	IT	L/PE and N/PE	100 kA	2.5 kV	-	2.5 kV	
DS254E-300	3371	230/400 V 3-phase+N	TNS	L/PE and N/PE	100 kA	2.5 kV	-	2.5 kV	4
DS254E-120	3961	120/208 V 3-phase+N	TNS	L/PE and N/PE	100 kA	1 kV	-	1 kV	
DS253E-400	3939	230/400 V 3-phase	IT	L/PE	75 kA	2.5 kV	-	-	
DS253E-300	3350	230/400 V 3-phase	TNC	L/PE	75 kA	2.5 kV	-	-	3
DS253E-120	3887	120/208 V 3-phase	TNC	L/PE	75 kA	1 kV	-	-	
DS252E-300/G	3404	230 V 3-phase	TT-TN	L/N and N/PE	50 kA	-	2.5 kV	1.5 kV	2
DS252E-120/G	3904	120 V single phase	TT-TN	L/N and N/PE	50 kA	-	1 kV	1.5 kV	
DS252E-400	3952	230 V single phase	IT	L/PE and N/PE	50 kA	2.5 kV	-	2.5 kV	
DS252E-300	3962	230 V single phase	TN	L/PE and N/PE	50 kA	2.5 kV	-	2.5 kV	1
DS252E-120	3951	120 V single phase	TN	L/PE and N/PE	50 kA	1 kV	-	1 kV	



DS254E-300/G