



CITEL




DS44VG-230



- Type 2 + 3 AC Multipolar surge protector
- In : 20 kA
- I_{max} total: 160 kA
- Pluggable module
- Follow and operating current : none
- No ageing
- Optional remote signaling state
- Optimized to TOV
- EN 61643-11, CEI 61643-11, UL1449 ed.4 compliance

Electrical Characteristics		
SPD type <i>following IEC test</i>		2+3
Network		230/400 V 3-phase+N
AC system		TNS
Nominal line voltage	<i>Un</i>	230 Vac
Max. AC operating voltage L-N	<i>Uc</i>	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. <i>without disconnection</i>	<i>UT</i>	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn <i>without disconnection or with safety disconnection</i>	<i>UT</i>	440 Vac withstand
Residual Current <i>Leakage current to Ground</i>	<i>I_{pe}</i>	None
Operating current <i>Continuous current at U_c</i>	<i>I_c</i>	None
Follow current	<i>I_f</i>	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	<i>I_n</i>	20 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	<i>I_{max}</i>	40 kA
Total Maximal discharge current <i>max. total withstand @ 8/20 μs</i>	<i>I_{max Total}</i>	160 kA
Withstand on Combaision waveform IEC 61643-11 <i>Class III test: 1.2/50μs - 8/20μs</i>	<i>U_{oc}</i>	6 kV
Withstand on overvoltages IEEE C62.41.1		20 kV
Admissible short-circuit current	<i>I_{sc}</i>	25000 A
Connection mode(s)		L/PE and N/PE
Protection mode(s)		Common mode
Residual voltage <i>@ I_n (8/20 μs)</i>	<i>U_{p-in}</i>	0.8 kV
Protection level L/PE <i>@ I_n (8/20μs)</i>	<i>U_{p L/PE}</i>	1.25 kV
Internal short circuit protection		No
Internal Thermal protection		Yes

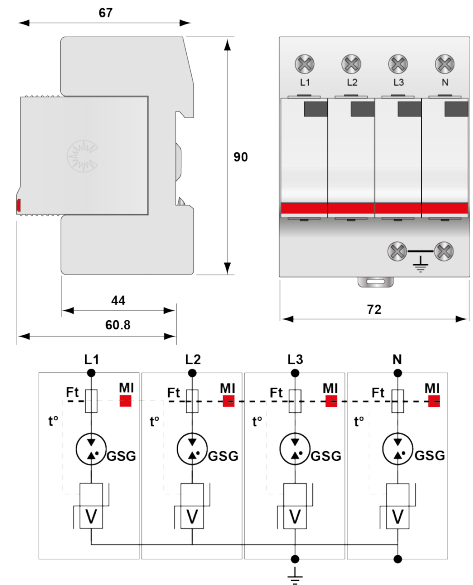

V: High-energy varistor
 GSG: Specific Gas Tube
 Ft: Thermal fuse
 t°: Thermal disconnection system
 MI: Disconnection indicator



CITEL

Mechanical Characteristics	
Technology	VG
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25 mm ² / by bus
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN60715)
Housing material	Thermoplastic UL94-V0
Operating temperature	-40/+85°C
Protection rating	IP20
Failsafe behavior	Disconnection
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM40VG-230
Remote signaling of disconnection	option DS44VGS-230 : output on changeover contact
Dimensions	See diagram
Disconnectors	
Thermal disconnecter	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	Fuses type gG - 50 A
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 4ed.
Certification	EAC
Part Number	461552